


OVERVIEW

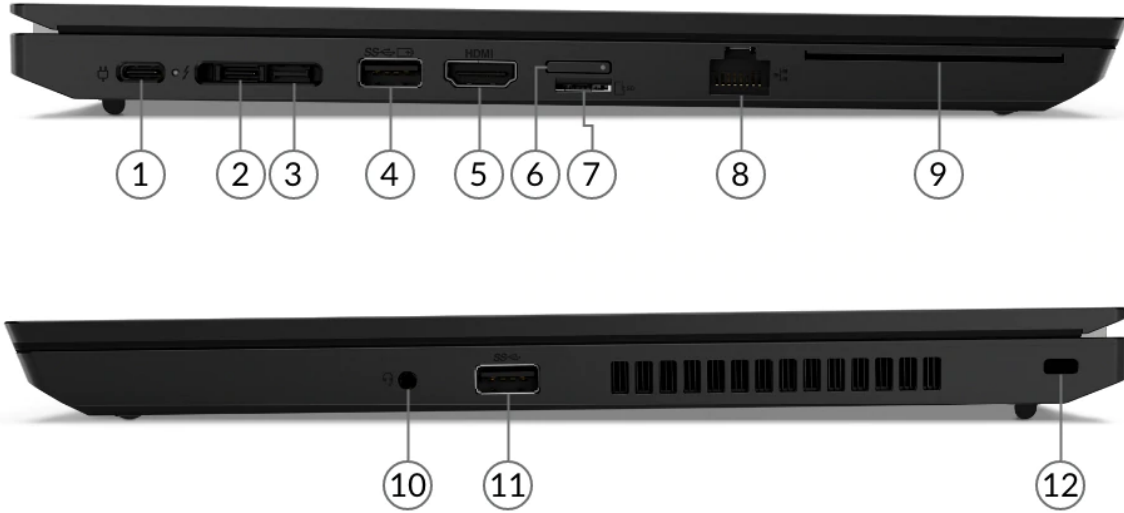

1. USB-C 3.2 Gen 1	7. MicroSD card reader
2. Thunderbolt 4	8. Ethernet (RJ-45) *
3. Side docking connector *	9. Smart card reader *
4. USB 3.2 Gen 1 (Always On)	10. Headphone / microphone combo jack (3.5mm)
5. HDMI 2.0	11. USB 3.2 Gen 1
6. Nano-SIM card slot *	12. Kensington Security Slot

Notes:

- Ports with * are only available on selected models
- The combination of 2 and 3 is side docking connector

PERFORMANCE

Processor

Processor Family

Intel® Celeron® or 11th Generation Intel Core™ i3 / i5 / i7 Processor

Processor**^[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Celeron 6305	2	2	1.8GHz	-	4MB	DDR4-3200	Intel UHD Graphics
Core i3-1115G4	2	4	3.0GHz	4.1GHz	6MB	DDR4-3200	Intel UHD Graphics
Core i5-1135G7	4	8	2.4GHz	4.2GHz	8MB	DDR4-3200	Intel Iris® Xe Graphics
Core i5-1145G7	4	8	2.6GHz	4.4GHz	8MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1165G7	4	8	2.8GHz	4.7GHz	12MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1185G7	4	8	3.0GHz	4.8GHz	12MB	DDR4-3200	Intel Iris Xe Graphics

Notes:

1. Intel Celeron processor is NOT available in EMEA

Operating System

Operating System**^[1]

- Windows® 10 Pro 64
- Windows 10 Home 64
- Windows 10 IoT Enterprise LTSC
- Windows 11 Pro 64
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Linux
- Ubuntu Linux
- No operating system

Notes:

1. Windows 10 IoT Enterprise LTSC is for special bid only

Graphics

Graphics**^[1]

Graphics	Type	Memory	Key Features
Intel UHD Graphics	Integrated	Shared	DirectX® 12
Intel Iris Xe Graphics	Integrated	Shared	DirectX 12
NVIDIA® GeForce® MX450	Discrete	2GB GDDR6	DirectX 12

Notes:

1. Intel Iris Xe Graphics capability requires system to be configured with Intel Core i5 or i7 processor and dual-channel memory. On the system with Intel Core i5 or i7 processor and single-channel memory, Intel Iris Xe Graphics will function as Intel UHD graphics
NVIDIA GeForce MX450 is NOT available in EMEA

Monitor Support

Monitor Support

Supports up to 3 independent displays via native display and 2 external monitors; supports external monitors via HDMI® (up to 4096x2160@60Hz), USB-C (up to 5120x3200@60Hz) or Thunderbolt™ (up to 5120x3200@60Hz)

Chipset

Chipset

Intel SoC (System on Chip) platform

Memory

ThinkPad L15 Gen 2 (Intel)

Max Memory^[1]

Up to 64GB DDR4-3200

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type

DDR4-3200

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

- HDD/SSD mode: up to two drives, 1x 2.5" HDD + 1x M.2 SSD
 - 2.5" HDD up to 2TB
 - M.2 2242 SSD up to 512GB
- One SSD mode: one drive, 1x M.2 SSD
 - M.2 2280 SSD up to 1TB
 - M.2 2242 SSD up to 512GB

Storage Slot^[2]

- HDD/SSD mode: one 2.5" drive slot + one M.2 slot
 - One 2.5" drive slot, supports 2.5" SATA HDD
 - One M.2 2242 PCIe® Gen 3x4 slot, supports M.2 2242 SSD
- One SSD mode: one M.2 slot
 - One M.2 2280 PCIe Gen 3x4 slot, supports M.2 2242/2280 SSD

Storage Type

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	5.4K	APS (Active Protection System™)
2.5" SATA HDD	SATA 6Gb/s	7.2K	APS (Active Protection System)
M.2 2242 SSD	PCIe NVMe®, PCIe 3.0 x4	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal2

Notes:

1. HDD/SSD mode is NOT available in EMEA
2. System has one HDD slot or one M.2 2280 slot exclusively for storage

Removable Storage

Optical

None

Card Reader

MicroSD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™ Premium

Microphone^[1]

- Dual array microphone
- No microphone

Camera^{**[2]}

- 720p, with privacy shutter, fixed focus
- IR & 720p hybrid, with privacy shutter, fixed focus

ThinkPad L15 Gen 2 (Intel)

- No camera

Notes:

- No microphone is for special bid only
- No camera is for special bid only

Battery

Battery

Integrated Li-Polymer 45Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Max Battery Life^[1]

MobileMark® 2018: 7.53 hr
JEITA 2.0: 11.255 hr

Notes:

- All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter^{**[1]}

- 45W USB-C (2-pin) AC adapter
- 45W USB-C (3-pin) AC adapter
- 65W USB-C slim (3-pin) AC adapter
- 65W USB-C slim (2-pin) AC adapter
- 65W USB-C (2-pin) AC adapter
- 65W USB-C (3-pin) AC adapter
- No power adapter

Notes:

- No power adapter is for special bid only
45W USB-C AC adapter and 65W USB-C slim AC adapter are NOT available in EMEA

DESIGN

Display

Display^{**[1]}

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
15.6"	HD (1366x768)	None	TN	220 nits	Anti-glare	16:9	400:1	45% NTSC	90°	-
15.6"	FHD (1920x1080)	None	IPS	250 nits	Anti-glare	16:9	700:1	45% NTSC	170°	-
15.6"	FHD (1920x1080)	Multi-touch	IPS	300 nits	Anti-glare	16:9	700:1	45% NTSC	170°	-

Touchscreen

- On-cell touch, supports 10-point touch
- Non-touch

Notes:

- California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

Keyboard Backlight

- LED backlight
- No support

UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad

Mechanical**Dimensions (WxDxH)**

Models	Dimensions
All models	366.5 x 250 x 21 mm (14.43 x 9.84 x 0.83 inches)

Weight^[1]

Models	Weight
All models	1.98 kg (4.37 lbs)

Case Color

Black

Case Material

PC + ABS (top), PC + ABS (bottom)

Notes:

1. The system weight varies depending on configurations

CONNECTIVITY**Network****Onboard Ethernet****

- Gigabit Ethernet, Intel Ethernet Connection I219-LM (vPro models)
- Gigabit Ethernet, Intel Ethernet Connection I219-V (non-vPro models)
- No Ethernet

WLAN + Bluetooth®^[1]**

- Wi-Fi® 6, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 card
- Mediatek Wi-Fi 6 MT7921, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 Card
- Realtek RTL8852AE, Wi-Fi 6, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.2, M.2 card
- Intel Wi-Fi 6 AX200, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 card
- Intel Wi-Fi 6E AX210, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 Card
- No WLAN and Bluetooth

WWAN**

- Wireless WAN upgradable to 4G
- Integrated Mobile Broadband 4G LTE, Quectel EM120R-GL, M.2 card, with embedded eSIM functionality
- No support

SIM Card

No SIM card inbox

NFC

- Near Field Communication
- No support

Notes:

1. Intel WiFi 6 full features might be limited by country level restrictions
Bluetooth 5.2 is supported with driver version 22.30 and later

Ports^[1]**Standard Ports**

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)

ThinkPad L15 Gen 2 (Intel)

- 1x USB-C 3.2 Gen 1 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x Thunderbolt 4 / USB4™ 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort 1.4)
- 1x HDMI 2.0
- 1x microSD card reader
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports***[2]

- 1x Ethernet (RJ-45)
- 1x Side docking connector
- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN model)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3: 40 Gbit/s;
FireWire 400: 400 Mbit/s;
FireWire 800: 800 Mbit/s
2. For the models without Ethernet connector, it is recommended to use the Lenovo USB-C to Ethernet Adapter for Ethernet connection.

Monitor Cable

Monitor Cable***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip**

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in chipset
- Disabled (in some regions)

Physical Locks

Kensington® Security Slot

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

- Touch style fingerprint reader on palm rest, match-on-chip
- No fingerprint reader

BIOS Security

- Supervisor password
- Power-on password
- Hard disk password (for HDD)
- NVMe password (for NVMe SSD)
- Self-healing BIOS

Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello

MANAGEABILITY

System Management

System Management

- Intel vPro Technology, DASH
- None

SERVICE**Warranty****Base Warranty****

- 1-year depot service
- 1-year depot with 2-year system board service
- 1-year limited onsite service
- 1-year + 2-year depot service
- 1-year + 2-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

ENVIRONMENTAL**Operating Environment****Temperature^[1]**

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F)

CERTIFICATIONS**Green Certifications****Green Certifications**

- EPEAT™ Gold
- ENERGY STAR® 8.0
- TCO
- RoHS compliant

Other Certifications**Mil-Spec Test**

MIL-STD-810H military test passed


- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS,"

WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.


- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel

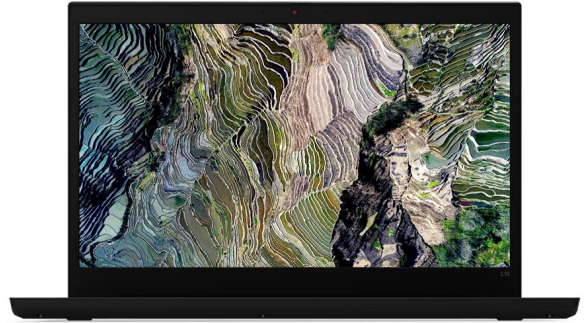

intel

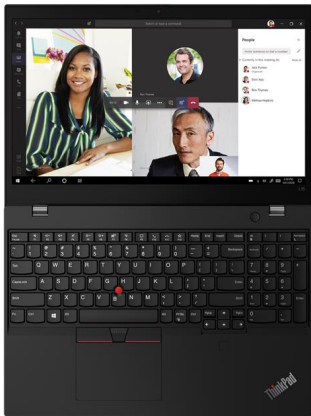

intel



intel



intel



intel