


OVERVIEW

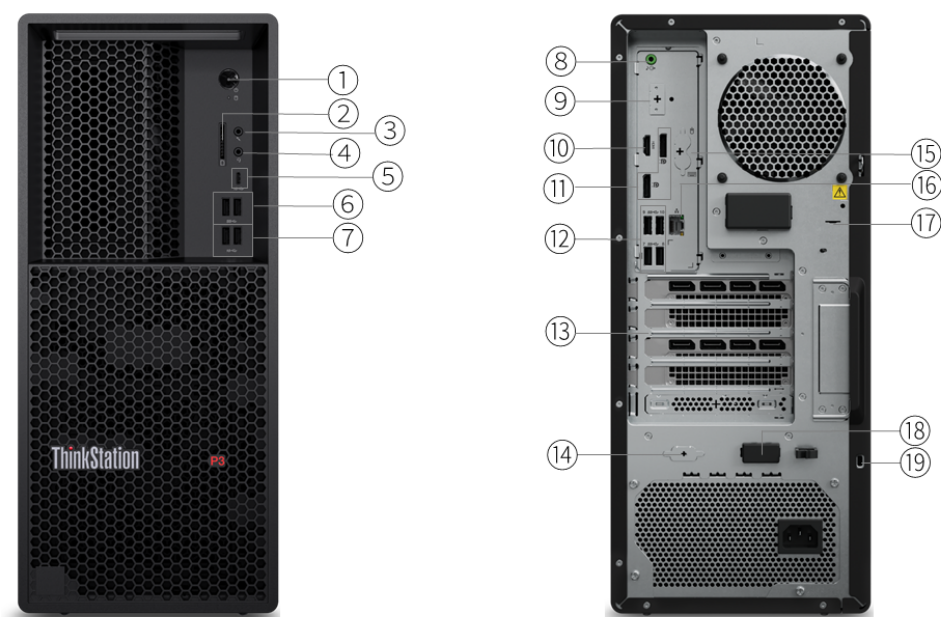

1. Power button	11. 2x DisplayPort
2. SD card reader *	12. 4x USB-A (USB 5Gbps)
3. Microphone jack (3.5mm)	13. Optional ports on expansion cards *
4. Headphone / microphone combo jack (3.5mm)	14. Serial (9-pin) *
5. USB-C (USB 10Gbps), data transfer only	15. 2x PS/2 ports (keyboard / mouse) *
6. 2x USB-A (USB 5Gbps)	16. Ethernet (GbE RJ-45)
7. 2x USB-A (USB 10Gbps)	17. E-lock slot
8. Audio line-out (3.5mm)	18. Cable lock slot
9. Flex IO *	19. Kensington Security Slot
10. HDMI	

- Notes:
- Items with * are only available on selected models
 - Flex IO supports one optional port from HDMI, VGA, USB-C (with DP function), and DP.

PERFORMANCE

Processor

Processor Family

Up to one 125W Intel® Core™ i3 / i5 / i7 / i9 (13th Gen or 14th Gen) processor; supports up to 24 cores; up to 6GHz

Processor**[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics	Intel® vPro® Eligibility
Core i3-13100	4 (4 P-core + 0 E-core)	8	P-core 3.4GHz	P-core 4.5GHz	5MB L2 Cache / 12MB Intel® Smart Cache	DDR5-4800	Intel® UHD Graphics 730	-
Core i5-13400	10 (6 P-core + 4 E-core)	16	P-core 2.5GHz / E-core 1.8GHz	P-core 4.6GHz / E-core 3.3GHz	9.5MB L2 Cache / 20MB Intel® Smart Cache	DDR5-4800	Intel® UHD Graphics 730	-
Core i5-13500	14 (6 P-core + 8 E-core)	20	P-core 2.5GHz / E-core 1.8GHz	P-core 4.8GHz / E-core 3.5GHz	11.5MB L2 Cache / 24MB Intel® Smart Cache	DDR5-4800	Intel® UHD Graphics 770	Intel® vPro® Enterprise
Core i5-13600	14 (6 P-core + 8 E-core)	20	P-core 2.7GHz / E-core 2.0GHz	P-core 5.0GHz / E-core 3.7GHz	11.5MB L2 Cache / 24MB Intel® Smart Cache	DDR5-4800	Intel® UHD Graphics 770	Intel® vPro® Enterprise
Core i5-13600K	14 (6 P-core + 8 E-core)	20	P-core 3.5GHz / E-core 2.6GHz	P-core 5.1GHz / E-core 3.9GHz	20MB L2 Cache / 24MB Intel® Smart Cache	DDR5-5600	Intel® UHD Graphics 770	Intel® vPro® Enterprise
Core i7-13700	16 (8 P-core + 8 E-core)	24	P-core 2.1GHz / E-core 1.5GHz	Max Turbo up to 5.2GHz / P-core 5.1GHz / E-core 4.1GHz	24MB L2 Cache / 30MB Intel® Smart Cache	DDR5-5600	Intel® UHD Graphics 770	-
Core i7-13700K	16 (8 P-core + 8 E-core)	24	P-core 3.4GHz / E-core 2.5GHz	Max Turbo up to 5.4GHz / P-core 5.3GHz / E-core 4.2GHz	24MB L2 Cache / 30MB Intel® Smart Cache	DDR5-5600	Intel® UHD Graphics 770	-
Core i9-13900	24 (8 P-core + 16 E-core)	32	P-core 2.0GHz / E-core 1.5GHz	Max Turbo up to 5.6GHz / P-core 5.2GHz / E-core 4.2GHz	32MB L2 Cache / 36MB Intel® Smart Cache	DDR5-5600	Intel® UHD Graphics 770	-
Core i9-13900K	24 (8 P-core + 16 E-core)	32	P-core 3.0GHz / E-core 2.2GHz	Max Turbo up to 5.8GHz / P-core 5.4GHz / E-core 4.3GHz	32MB L2 Cache / 36MB Intel® Smart Cache	DDR5-5600	Intel® UHD Graphics 770	-
Core i3-14100	4 (4 P-core + 0 E-core)	8	P-core 3.5GHz	P-core 4.7GHz	5MB L2 Cache / 12MB Intel® Smart Cache	DDR5-4800	Intel® UHD Graphics 730	-
Core i5-14400	10 (6 P-core + 4 E-core)	16	P-core 2.5GHz / E-core 1.8GHz	P-core 4.7GHz / E-core 3.5GHz	9.5MB L2 Cache / 20MB Intel® Smart Cache	DDR5-4800	Intel® UHD Graphics 730	-
Core i5-14500	14 (6 P-core + 8 E-core)	20	P-core 2.6GHz / E-core 1.9GHz	P-core 5.0GHz / E-core 3.7GHz	11.5MB L2 Cache / 24MB Intel® Smart Cache	DDR5-4800	Intel® UHD Graphics 770	Intel® vPro® Enterprise
Core i5-	14 (6 P-	20	P-core 2.7GHz	P-core 5.2GHz / E-	20MB L2	DDR5-	Intel® UHD	Intel® vPro®

14600	core + 8 E-core)		/ E-core 2.0GHz	core 3.9GHz	Cache / 24MB Intel® Smart Cache	5600	Graphics 770	Enterprise
Core i5-14600K	14 (6 P-core + 8 E-core)	20	P-core 3.5GHz / E-core 2.6GHz	P-core 5.3GHz / E-core 4.0GHz	20MB L2 Cache / 24MB Intel® Smart Cache	DDR5-5600	Intel® UHD Graphics 770	Intel® vPro® Enterprise
Core i7-14700	20 (8 P-core + 12 E-core)	28	P-core 2.1GHz / E-core 1.5GHz	Max Turbo up to 5.4GHz / P-core 5.3GHz / E-core 4.2GHz	28MB L2 Cache / 33MB Intel® Smart Cache	DDR5-5600	Intel® UHD Graphics 770	Intel® vPro® Enterprise
Core i7-14700K	20 (8 P-core + 12 E-core)	28	P-core 3.4GHz / E-core 2.5GHz	Max Turbo up to 5.6GHz / P-core 5.5GHz / E-core 4.3GHz	28MB L2 Cache / 33MB Intel® Smart Cache	DDR5-5600	Intel® UHD Graphics 770	Intel® vPro® Enterprise
Core i9-14900	24 (8 P-core + 16 E-core)	32	P-core 2.0GHz / E-core 1.5GHz	Max Turbo up to 5.8GHz / P-core 5.4GHz / E-core 4.3GHz	32MB L2 Cache / 36MB Intel® Smart Cache	DDR5-5600	Intel® UHD Graphics 770	Intel® vPro® Enterprise
Core i9-14900K	24 (8 P-core + 16 E-core)	32	P-core 3.2GHz / E-core 2.4GHz	Max Turbo up to 6.0GHz / P-core 5.6GHz / E-core 4.4GHz	32MB L2 Cache / 36MB Intel® Smart Cache	DDR5-5600	Intel® UHD Graphics 770	Intel® vPro® Enterprise

Processor Sockets

1x FCLGA1700

Notes:

[1] Intel® Max Turbo frequency will vary depending on application workload and the hardware and software configurations, see <http://www.intel.com/technology/turboboost/> for more information.

AI (Artificial Intelligence)

AI PC Category^[1]

AI-Ready Workstations

Notes:

[1] With scalable configurations of higher-performance CPUs and professional NVIDIA® RTX GPUs, in addition to advantage of the same modern AI PC technology, AI-Ready workstation power the demanding AI consumption & development workflows.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 DG Windows® 10 Pro 64
- Ubuntu Linux LTS
- Red Hat Enterprise Linux 9.2 (certified only, for detailed and latest information, please visit [Red Hat Certified Hardware](#))
- No preload operating system

Graphics

Integrated Graphics**

- Intel® UHD Graphics 730
- Intel® UHD Graphics 770

Discrete Graphics Support

Supports up to one NVIDIA® RTX 5000 Ada Generation or two NVIDIA® RTX A2000

Discrete Graphics Offering

Graphics	Memory	Power	Connector	Form Factor	SLI / NVLink
NVIDIA® RTX 5000 Ada Generation	32GB GDDR6 with ECC	250W	4x DP 1.4a	Dual slot	-
NVIDIA® RTX 4500 Ada Generation	24GB GDDR6 with ECC	210W	4x DP 1.4a	Dual slot	-
NVIDIA® RTX 4000 Ada Generation	20GB GDDR6 with ECC	130W	4x DP 1.4a	Single slot	-
NVIDIA® RTX 2000 Ada Generation	16GB GDDR6 with ECC	70W	4x miniDP 1.4a	Dual slot	None
NVIDIA® T1000 8GB	8GB GDDR6	50W	4x miniDP 1.4	Single slot	None
NVIDIA® T400 4GB	4GB GDDR6	40W	3x miniDP 1.4	Single slot	None
NVIDIA® RTX A5500	24GB GDDR6 with ECC	230W	4x DP 1.4a	Dual slot	None
NVIDIA® RTX A5000	24GB GDDR6 with ECC	230W	4x DP 1.4a	Dual slot	None
NVIDIA® RTX A4500	20GB GDDR6 with ECC	200W	4x DP 1.4	Dual slot	None
NVIDIA® RTX A4000	16GB GDDR6 with ECC	140W	4x DP 1.4a	Single slot	None
NVIDIA® RTX A2000 12GB	12GB GDDR6	70W	4x miniDP 1.4a	Dual slot	None
NVIDIA® RTX A1000	8GB GDDR6	50W	4x miniDP 1.4a	Single slot	None
NVIDIA® RTX A400	4GB GDDR6	50W	4x miniDP 1.4a	Single slot	None

Monitor Support

Monitor Support

Supports multiple displays via onboard video ports and discrete graphics, the number of maximum monitors supported depends on the graphic card in use

Chipset

Chipset

Intel® W680 chipset

Memory

Max Memory^[1]

Up to 128GB (4x 32GB DDR5 UDIMM)

Memory Type^{**[2]}

- DDR5-4400 UDIMM ECC, maximum transfer speeds of up to 4400 MT/s
- DDR5-4400 UDIMM non-ECC, maximum transfer speeds of up to 4400 MT/s

Memory Slots

4 DDR5 DIMM slots, 2 channels capable

Memory Protection

ECC on models with ECC DIMMs and ECC capable processor

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.
[2] 4400 MT/s is maximum operating speed, memory operating speed varies depending on memory configuration:
1x 8GB / 2x 8GB / 1x 16GB / 2x 16GB / 2x 32GB configurations run at 4400 MT/s;
4x 8GB / 4x 16GB configurations run at 4000 MT/s;
4x 32GB configuration runs at 3600 MT/s.

Storage

Max Storage Support^{[1][2]}

Up to five drives (4x HDD + 1x M.2 SSD) or six drives (3x HDD + 3x M.2 SSD)

- 3.5" HDD up to 6TB each
- 2.5" HDD up to 1TB each
- M.2 SSD up to 4TB or 2TB each (see Storage Type)

Storage Type^[3]

Disk Type	Interface	RPM	Offering	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	1TB / 1TB FIPS	-

3.5" SATA HDD	SATA 6Gb/s	7.2K	1TB / 2TB / 4TB / 6TB	-
M.2 2280 SSD for Single M.2 to PCIe® adapter	PCIe® NVMe®, PCIe® 4.0 x4	-	256GB	Opal 2.0
M.2 2280 SSD for Onboard	PCIe® NVMe®, PCIe® 4.0 x4 Performance	-	512GB / 1TB / 2TB / 4TB	Opal 2.0
M.2 2280 SSD for Single M.2 to PCIe® adapter	PCIe® NVMe®, PCIe® 4.0 x4 Performance	-	512GB / 1TB / 2TB	Opal 2.0

Storage Controllers

Storage Controller	Type	Interface	RAID	Cache
Integrated NVMe® controller	Standard	PCIe® NVMe®	0/1	None
Integrated SATA controller	Standard	SATA 6.0Gb/s	0/1/10/5	None

- Notes:
- [1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.
- [2] For certain post-manufacturing storage upgrades, additional upgrade kits may be required.
- [3] M.2 slot on single M.2 to PCIe® adapter works at PCIe® 3.0.

Removable Storage

Optical Support

Optional one 9.0mm optical drive, DVD-ROM, DVD±RW, and Blu-ray

Card Reader

- SD card reader
- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC897Q-CG codec

Speakers

Single speaker, 2W x1

Power Supply

Power Supply**

Power	Type	Efficiency	Key Features
500W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified
750W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified
1100W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified

DESIGN

Mechanical^[1]

Form Factor

Tower (27L)

Dimensions (WxDxH)^[2]

180 x 370 x 415 mm (7.09 x 14.57 x 16.34 inches)

Weight^[3]

13.61 kg (30.00 lbs, maximum configuration)

Bays^[4]

Up to four disk bays:

- Bay 1 supports one 3.5" / 2.5" drive, standard
- Bay 2 supports one 3.5" / 2.5" drive, optional
- Bay 3 supports one 3.5" / 2.5" drive, optional
- Bay 4 supports one 3.5" / 2.5" drive, optional

- Front Access HDD Bay supports one 3.5" / 2.5" drive, optional, occupies Bay 3 location

M.2 Slots

- Up to 3x M.2 SSD:
 - 2 via onboard slot, can't be available when 4th HDD is selected
 - 1 via Single M.2 to PCIe® adapter
- One M.2 slot (for WLAN)

Expansion Slots

Supports four PCIe® slots with two PCIe® 4.0 x16 and two PCIe® 3.0 x1.

- Slot 1: PCIe® 4.0 x16, full height, full length, 75W, double-width
- Slot 2: PCIe® 3.0 x1, full height, half length, 25W
- Slot 3: PCIe® 4.0 x16 (x4 lanes), full height, half length, 25W
- Slot 4: PCIe® 3.0 x1, full height, half length, 25W

EOU

Tool-less design for side cover, memory, 3.5" HDD, optical, PCIe® card assembly / removal

Notes:

[1] The actual data transfer rate of the following PCIe® interface also depends on the capabilities of the connected PCIe® device. The listed values represent theoretical maximums.

PCIe® 3.0 (x1 / x2 / x4 / x8 / x16): 1 GB/s (8 Gbps) / 2 GB/s (16 Gbps) / 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps);

PCIe® 4.0 (x1 / x2 / x4 / x8 / x16): 2 GB/s (16 Gbps) / 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps) / 32 GB/s (256 Gbps);

PCIe® 5.0 (x1 / x2 / x4 / x8 / x16): 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps) / 32 GB/s (256 Gbps) / 64 GB/s (512 Gbps).

[2] The system dimensions may vary depending on configurations.

[3] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[4] Front access HDD bay can be selected when disk bays is equal or less than 2.
2.5" drive requires additional 3.5" to 2.5" conversion kit

CONNECTIVITY

Network

WLAN + Bluetooth^[1]

- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, Intel® vPro® technology support
- No WLAN and Bluetooth®

Onboard Ethernet

Gigabit Ethernet, Intel® Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN

Optional Ethernet

Up to two additional PCIe® x1 Ethernet adapters or one PCIe® x4 or x8 Ethernet adapter support; up to two additional 25GbE ports

- Gigabit Ethernet, Intel® I210-T1, 1x RJ-45, PCIe® x1
- Gigabit Ethernet, Intel® I350-T2, 2x RJ-45, PCIe® x4
- Gigabit Ethernet, Broadcom BCM5719, 4x RJ-45, PCIe® x4
- Gigabit Ethernet, Broadcom BCM5720, 2x RJ-45, PCIe® x1
- Gigabit Ethernet, Realtek® RTL8168H, 1x RJ-45, PCIe® x1
- 2.5 Gigabit Ethernet, Realtek® RTL8125BGS, 1x RJ-45, PCIe® x1
- 10 Gigabit Ethernet, Marvell AQtion AQN-107, 1x RJ-45, PCIe® x4
- 10 Gigabit Ethernet, Intel® X710-T2L, 2x RJ-45, PCIe® x8
- 25 Gigabit Ethernet, NVIDIA® Mellanox ConnectX-6, 2x SFP28, PCIe® x8

Notes:

[1] Wi-Fi® operation (including Wi-Fi® 6, Wi-Fi® 6E, Wi-Fi® 7, etc.) is subject to the regulatory requirements of each country. Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

Ports^[1]

Front Ports

- 1x USB-C® (USB 10Gbps / USB 3.2 Gen 2), data transfer only
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 2x USB-A (USB 10Gbps / USB 3.2 Gen 2)
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

Optional Front Ports

1x SD card reader

Rear Ports

- 4x USB-A (USB 5Gbps / USB 3.2 Gen 1), one supports Smart Power On
- 1x HDMI® 2.1 TMDS
- 2x DisplayPort™ 1.4
- 1x Ethernet (GbE RJ-45)
- 1x line-out (3.5mm)

Optional Rear Ports^[2]

- 1x USB-C® (USB 5Gbps / USB 3.2 Gen 1), with DisplayPort™ function (Flex IO)
- 1x HDMI® 2.1 TMDS (Flex IO)
- 1x DP 1.2 (Flex IO)
- 1x VGA (Flex IO)
- 1x parallel (via cable and PCIe® bracket)
- 1x Thunderbolt™ 4 (via additional PCIe® adapter)
- 1x USB-C® (USB 20Gbps / USB 3.2 Gen 2x2), support data transfer, via PCIe® x4 card
- 2x USB-A (Hi-Speed USB / USB 2.0), via cable and PCIe® bracket
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1), via additional PCIe® x1 adapter
- 1x serial (via cable)
- 4x serial (via 4-port serial expansion card, PCIe® x1)
- 2x PS/2 (via cable)

Notes:

[1] The transfer speed of the ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes, and other factors related to system configuration and your operating environment, will be slower than the theoretical speed.

[2] 2x USB 2.0 and 1x parallel can not be chosen simultaneously.

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

Physical Locks

- (Optional) Cable lock
- (Optional) E-lock
- Kensington® Security Slot™, 3 x 7 mm
- Padlock Loop

Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

BIOS Security

- Administrator password
- UEFI Secure Boot
- Power-on password
- Self-healing BIOS

MANAGEABILITY

System Management

System Management^{[1][2]}

- Intel® vPro® Enterprise with Intel® AMT 16
- Non-vPro®

Notes:

[1] Intel® vPro® offers a superset of DASH's defined capabilities.

[2] Intel® vPro® platform require an eligible Intel® processor, a supported operating system, Intel® LAN and/or WLAN silicon, firmware enhancements, and other hardware and software necessary to deliver the manageability use cases, security features, system performance, and stability that define the platform. See [Intel® vPro® Platform](#) for details.

SERVICE

Warranty^[1]

Base Warranty**

- 1-year limited onsite service
- 2-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://support.lenovo.com/warrantylookup/warrantypolicy>.

OPERATING REQUIREMENTS

Operating Environment

Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

ENVIRONMENTAL

Sustainability

Material^[1]

- 95% PCC ABS bezel
- 95% PCC ABS wired USB keyboard/mouse top/bottom cover
- 16% recycled SGCC metal chassis
- 90% PIC recycled plastic EPE cushion
- 30% OBP used in bag
- FSC certified paper in packaging

Notes:

[1] PCC: Post Consumer Content, recycled materials from customers.

PIC: Post Industry Content, recycled materials from internal factories.

EPE: Expanded Polyethylene.

OBP: Ocean Bound Plastic, reducing plastic spill into the sea.

FSC: Forest Stewardship Council.

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Gold Registered^[2]
- ErP Lot 3
- RoHS compliant
- TCO Certified 9.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ is registered where applicable, please visit epeat.net for registration status by country.

ISV Certifications

ISV Certifications

Please visit [ISV certifications for Lenovo® Workstations](#)

- Feature with ** means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS", WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

