

OVERVIEW



1. USB-C 3.2 Gen 2	4. USB 3.2 Gen 1
2. USB 3.2 Gen 1	5. HDMI
3. Headphone / microphone combo jack (3.5mm)	6. Kensington Nano Security Slot

PERFORMANCE

Processor

Processor Family

Intel® N-series or Intel® Core™ i3 N-series Processor

Processor**

Processor Name	Cores	Threads	Max Frequency	Cache	Processor Graphics
N100	4	4	3.4GHz	6MB	Intel® UHD Graphics
N200	4	4	3.7GHz	6MB	Intel® UHD Graphics
Core i3-N305	8	8	3.8GHz	6MB	Intel® UHD Graphics

Operating System

Operating System

ChromeOS

Graphics

Graphics

Graphics	Type	Memory	TGP	Key Features
Intel® UHD Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12.1

Monitor Support

Monitor Support

Supports up to 3 independent displays (native display and 2 external monitors via HDMI® and USB-C®)

- HDMI® supports up to 3840x2160@30Hz
- USB-C® supports up to 3840x2160@60Hz

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory

- 4GB soldered memory, not upgradable
- 8GB soldered memory, not upgradable

Memory Slots

Memory soldered to systemboard, no slots

Memory Type^[1]

LPDDR5-4800

Notes:

[1] Installed memory is actually LPDDR5-6400 but run as LPDDR5-4800 due to platform limitation.

Storage

Storage Support

- 64GB eMMC 5.1 on systemboard
- 128GB eMMC 5.1 on systemboard
- 256GB eMMC 5.1 on systemboard

Storage Slot

eMMC on systemboard, no slots

Storage Type

Disk Type	Interface	Offering
Flash Memory	eMMC 5.1	64GB / 128GB / 256GB

Removable Storage

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio

Speakers

Stereo speakers, 2W x2, optimized with Waves MaxxAudio®

Microphone

Dual-microphone array

Camera**

- HD 720p, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus

Battery

Battery

57Wh Rechargeable Li-ion Battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Max Battery Life^[1]

- Intel® Core™ i3-N305 models:
Google power load test: 11 hr
- Intel® N100 or N200 models:
Google power load test: 14 hr

Notes:

[1] All battery life claims are approximate maximum and based on results using the MobileMark® 2014, MobileMark® 2018, MobileMark® 25, MobileMark® 30, JEITA 2.0, JEITA 3.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter**^[1]

- 45W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

Notes:

[1] AC adapter offerings depend on the country.

DESIGN

Display

Display**

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)
14"	HD (1366x768)	None	TN	250nits	Anti-glare	16:9	400:1	45% NTSC	45° / 45° / 15° / 35°
14"	FHD (1920x1080)	None	IPS ^[1]	300nits	Anti-glare	16:9	700:1	45% NTSC	85° / 85° / 85° / 85°
14"	FHD (1920x1080)	Multi-touch	IPS ^[2]	300nits	Anti-glare	16:9	1000:1	100% sRGB	89° / 89° / 89° / 89°

Touchscreen

- On-cell multi-touch, supports 10-point touch
- Non-touch

Notes:

[1], [2] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Pen

No support

Keyboard

Chrome keyboard, 6-row, spill-resistant, Anti-pick proof keycaps

Keyboard Backlight

- LED backlight
- Non-backlight

Touchpad

Buttonless Mylar® surface multi-touch touchpad, supports Precision TouchPad (PTP), 60.5 x 104 mm (2.38 x 4.09 inches)

Mechanical

Dimensions (WxDxH)^[1]

324.4 x 216.2 x 19.3 mm (12.77 x 8.51 x 0.76 inches)

Weight^[2]

Models	Weight
Intel® N100 / N200 models	Around 1.43 kg (3.2 lb)
Core i3-N305 models	Around 1.5 kg (3.3 lbs)

Case Color

Storm grey, dual-tone design

Surface Treatment

Aluminium stamping (anodized)

Case Material

Aluminium (top), PC-ABS (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

WLAN + Bluetooth®**

- MediaTek Wi-Fi® 6 MT7921, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 Card^[1]
- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 Card^[2]

WWAN

No support

Ethernet

No onboard Ethernet

Notes:

[1] Wi-Fi® 6 full features might be limited by country-level restrictions.

[2] Wi-Fi® 6E full features might be limited by country-level restrictions.

6GHz Wi-Fi® 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi® 6E, and the regional regulatory certifications & spectrum allocation.

Ports^[1]

Standard Ports

- 2x USB 3.2 Gen 1
- 1x USB-C® 3.2 Gen 2 (support data transfer, Power Delivery and DisplayPort™)
- 1x HDMI® 1.4b
- 1x Headphone / microphone combo jack (3.5mm)

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

SECURITY & PRIVACY

Security

Security Chip

Google Security Chip H1

Physical Locks

Kensington® NanoSaver® lock Slot

Fingerprint Reader

No fingerprint reader

BIOS Security

No support

Other Security

Camera privacy shutter

SERVICE

Warranty

Base Warranty**

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 2-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) courier or carry-in service

OPERATING REQUIREMENTS

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: 5°C (41°F) to 43°C (109°F)

Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- ENERGY STAR® 8.0
- EPEAT™ Gold Registered^[2]
- ErP Lot 6/26
- RoHS compliant
- TCO Certified 9.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ is registered where applicable, please visit epeat.net for registration status by country.

- Feature with ** means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel




intel



intel



intel

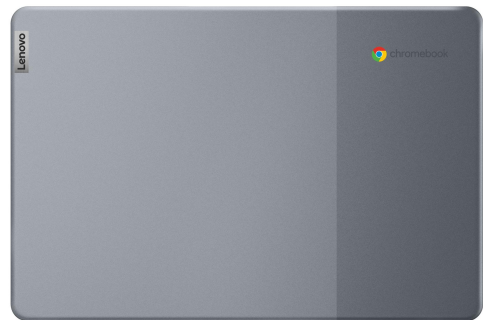

intel