
OVERVIEW

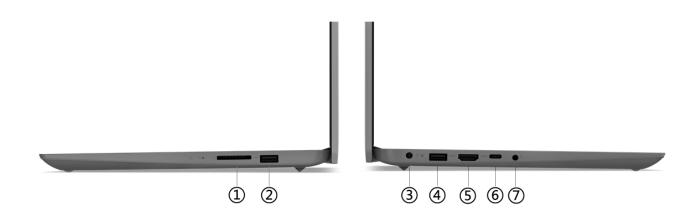

| 1. Card reader | 5. HDMI |
|--------------------|--|
| 2. USB 2.0 | 6. USB-C 3.2 Gen 1 (data transfer only) |
| 3. Power connector | 7. Headphone / microphone combo jack (3.5mm) |
| 4. USB 3.2 Gen 1 | |

IdeaPad 114ADA7

PERFORMANCE

Processor

Processor Family

AMD 3000, AMD Athlon[™], or AMD Ryzen[™] 3 / 5 Processor

Processor**

| Processor Name | Cores | Threads | Base Frequency | Max Frequency | Cache | Processor Graphics |
|-----------------------------|-------|---------|-------------------|------------------|--------------------|--------------------------------|
| AMD 3020e | 2 | 2 | 1.2GHz | 2.6GHz | 1MB L2 / 4MB L3 | AMD Radeon™ Graphics |
| AMD Athlon™ Silver 3050U | 2 | 2 | 2.3GHz | 3.2GHz | 1MB L2 / 4MB L3 | AMD Radeon™ Graphics |
| AMD Ryzen™ 3 3250U | 2 | 4 | 2.6GHz | 3.5GHz | 1MB L2 / 4MB L3 | AMD Radeon™ Graphics |
| AMD Ryzen™ 5 3500U | 4 | 8 | 2.1GHz | 3.7GHz | 2MB L2 / 4MB L3 | AMD Radeon™ Vega 8 Graphics |

Operating System

Operating System**

- Windows® 11 Pro
- Windows[®] 11 Home
- Windows® 11 Home Single Language
- Windows[®] 11 Home Single Language in S mode
- Windows® 11 Home in S mode
- No operating system

Graphics

Graphics**

| Graphics | Туре | Memory | Key Features |
|-----------------------------|------------|--------|--------------|
| AMD Radeon™ Graphics | Integrated | Shared | DirectX® 12 |
| AMD Radeon™ Vega 8 Graphics | Integrated | Shared | DirectX® 12 |

Monitor Support

Monitor Support

Supports up to 2 independent displays (native display and 1 external monitor via HDMI®)

 \bullet HDMI $^{\rm e}$ supports up to 4K@30Hz

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory**[1]

- Up to 4GB (4GB soldered + empty SO-DIMM slot) DDR4-2400 offering
- Up to 8GB (8GB SO-DIMM) DDR4-2400 offering

Memory Slots**

- One DDR4 SO-DIMM slot
- One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

Memory Type

DDR4-2400^[2]

Notes:

- [1] The max memory is based on the test results with current Lenovo® memory offerings.
- [2] Installed memory is actually DDR4-3200 but run as DDR4-2400 due to platform limitation.

Lenovo

Storage

Storage Support**[1]

- 64GB eMMC 5.1 on systemboard
- 128GB eMMC 5.1 on systemboard
- One drive, up to 1TB M.2 2242 SSD or 512GB M.2 2280 SSD

Storage Slot**

- eMMC on systemboard, no slots (eMMC models)
- One M.2 2280 PCIe[®] 3.0 x4 slot (M.2 SSD models)

Storage Type**[2]

| Disk Type | Interface | Offering |
|--------------|---|-----------------------------|
| M.2 2280 SSD | PCIe [®] NVMe [®] , PCIe [®] 3.0 x4 | 512GB |
| Flash Memory | eMMC 5.1 | 64GB / 128GB |
| M.2 2242 SSD | PCIe [®] NVMe [®] , PCIe [®] 3.0 x4 | 128GB / 256GB / 512GB / 1TB |
| M.2 2242 SSD | PCIe [®] NVMe [®] , PCIe [®] 4.0 x4 ^[3] | 512GB |

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

[2] System has one eMMC on systemboard or one M.2 2242/2280 SSD exclusively.

[3] The SSD with PCIe[®] 4.0x4 is downgraded to closer to PCIe[®] 3.0x4 due to AMD platform limitation.

Removable Storage

Card Reader

SD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio

Speakers

Stereo speakers, 1.5W x2, Dolby Audio™

Microphone

Dual-microphone array with noise-cancelling

Camera

HD 720p, with privacy shutter, fixed focus

Battery

Battery

Integrated Li-Polymer 42Wh battery, supports Rapid Charge Boost (get 2 hours of runtime with a 15-minute charge)

Max Battery Life^[1]

Local video (1080p) playback@150nits: 10 hr

Notes:

[1] All battery life claims are approximate maximum and based on results using the MobileMark® 2014, MobileMark® 2018, MobileMark® 25, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter

65W round tip (3-pin) AC adapter, 100-240V, 50-60Hz

DESIGN

Display

Display**

| Size | Resolution | Touch | Туре | Brightness | Surface | Aspect Ratio | Contrast Ratio | Color Gamut | Viewing Angle (L/R/U/D) |
|------|--------------------|-------|--------------------|------------|----------------|-----------------|-------------------|----------------|----------------------------|
| 14″ | HD (1366x768) | None | TN | 220nits | Anti- glare | 16:9 | 400:1 | 45% NTSC | 45°/45°/15°/35° |
| 14″ | FHD (1920x1080) | None | TN | 220nits | Anti- glare | 16:9 | 400:1 | 45% NTSC | 45°/45°/15°/35° |
| 14″ | FHD (1920x1080) | None | TN | 250nits | Anti- glare | 16:9 | 400:1 | 45% NTSC | 45°/45°/15°/35° |
| 14″ | FHD (1920x1080) | None | IPS ^[1] | 250nits | Anti- glare | 16:9 | 700:1 | 45% NTSC | 85°/85°/85°/85° |

Touchscreen

Non-touch

Notes:

[1] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Keyboard

6-row, multimedia Fn keys

Keyboard Backlight

Non-backlight

Touchpad

Buttonless Mylar[®] surface multi-touch touchpad, supports Precision TouchPad (PTP), 62 x 104 mm (2.44 x 4.09 inches)

Mechanical

Dimensions (WxDxH)^[1]

325.3 x 216.5 x 17.9 mm (12.8 x 8.52 x 0.70 inches)

Weight^[2]

Around 1.4 kg (3.09 lbs)

Case Color

Cloud grey

Surface Treatment

IMR (in-mold decoration by roller)

Case Material

PC-ABS (top), PC-ABS (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo[®] lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Ethernet

No onboard Ethernet

WLAN + Bluetooth®**

- 802.11ac 2x2 Wi-Fi[®] + Bluetooth[®] 5.0, M.2 card
- Wi-Fi[®] 6, 802.11ax 2x2 Wi-Fi[®] + Bluetooth[®] 5.1, M.2 card^[1]

Lenovo

Notes:

[1] Bluetooth[®] 5.2 is hardware ready but may run at a lower version due to OS limitations. Wi-Fi[®] 6 full features might be limited by country-level restrictions.

Ports^[1]

Standard Ports

- 1x USB 2.0
- 1x USB 3.2 Gen 1
- 1x USB-C[®] 3.2 Gen 1 (support data transfer only)
- 1x HDMI® 1.4b
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Card reader
- 1x Power connector

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

SECURITY & PRIVACY

Security

Security Chip

Firmware TPM 2.0 integrated in SoC

Fingerprint Reader

- Touch style fingerprint reader integrated in power button
- No fingerprint reader

BIOS Security***

- Administrator password
- Power-on password
- Hard disk password (M.2 SSD models only)

Other Security

Camera privacy shutter

SERVICE

Warranty

Base Warranty**

- 1-year mail-in service
- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 2-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) courier or carry-in service

ACCESSORIES

Bundled Accessories

Bundled Accessories

None

OPERATING REQUIREMENTS

Operating Environment

Temperature^{[1][2]}

- At altitudes up to 2438 m (8,000 ft)
 Operating: 5°C to 35°C (41°F to 95°F)
- Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)
 Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1], [2] When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications

Green Certifications^[2]

- (Optional) ENERGY STAR[®] 8.0
- ErP Lot 3
- RoHS compliant

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <u>https://compliance.lenovo.com</u>.
 [2] EPEAT[™] registration and ENERGY STAR[®] certification are dependent on system OS. Please visit <u>epeat.net</u> and <u>energystar.gov</u> for more information.

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.













AMD