


**OVERVIEW**

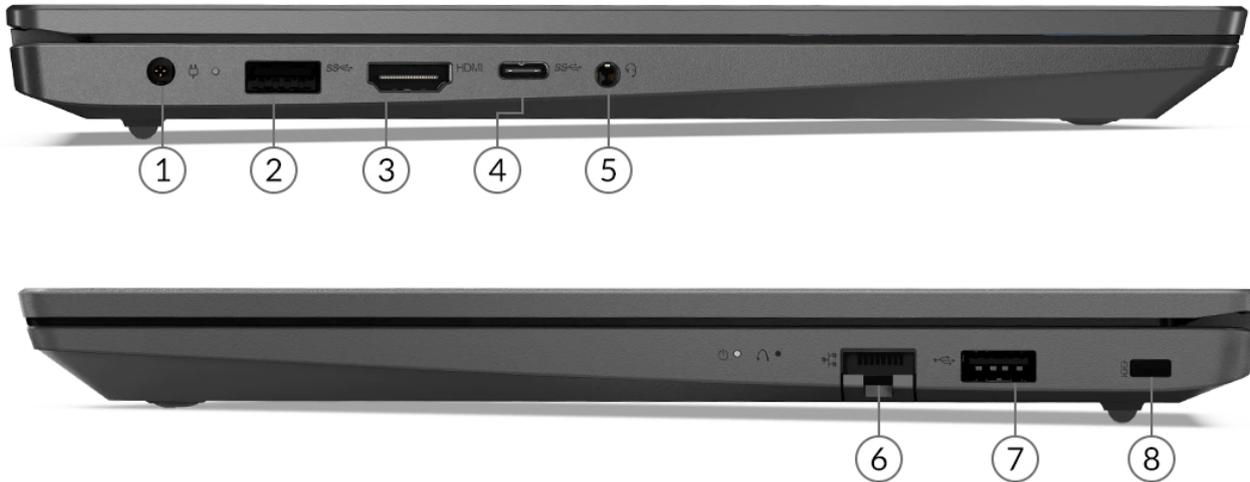

1. Power connector	5. Headphone / microphone combo jack (3.5mm)
2. USB 3.2 Gen 1	6. Ethernet (RJ-45)
3. HDMI 1.4b	7. USB 2.0
4. USB-C 3.2 Gen 1 (data transfer only)	8. Kensington Nano Security Slot

## PERFORMANCE

### Processor

#### Processor Family

11th Generation Intel® Core™ i3 / i5 / i7 Processor

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core i3-1115G4	2	4	3.0GHz	4.1GHz	6MB	Intel® UHD Graphics
Core i5-1135G7	4	8	2.4GHz	4.2GHz	8MB	Intel® Iris® Xe Graphics <sup>[1]</sup>
Core i7-1165G7	4	8	2.8GHz	4.7GHz	12MB	Intel® Iris® Xe Graphics <sup>[2]</sup>

Notes:

[1], [2] Intel® Iris® Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel® Iris® Xe Graphics will function as Intel® UHD Graphics.

### Operating System

#### Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- Windows® 10 Pro 64
- Windows® 10 Home 64
- Windows® 10 Home 64 Single Language
- No operating system

### Graphics

#### Graphics\*\*

Graphics	Type	Memory	TGP	Key Features
Intel® UHD Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12.1
Intel® Iris® Xe Graphics <sup>[1]</sup>	Integrated	Shared	Share CPU TDP	DirectX® 12.1
NVIDIA® GeForce MX350	Discrete	2GB GDDR5	-	DirectX® 12

Notes:

[1] Intel® Iris® Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel® Iris® Xe Graphics will function as Intel® UHD Graphics.

### Monitor Support

#### Monitor Support

Supports up to 2 independent displays (native display and 1 external monitor via HDMI®)

- HDMI® supports up to 3840x2160@30Hz

### Chipset

#### Chipset

Intel® SoC (System on Chip) platform

### Memory

#### Max Memory<sup>[1]</sup>

- Up to 12GB (4GB soldered + 8GB SO-DIMM) DDR4-3200 offering
- Up to 16GB (8GB soldered + 8GB SO-DIMM) DDR4-3200 offering

#### Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

#### Memory Type

DDR4-3200

## Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

## Storage

### Storage Support<sup>[1]</sup>

- Models with 38Wh battery: up to two drives, 1x 2.5" HDD + 1x M.2 SSD
  - 2.5" HDD up to 1TB
  - M.2 2242 SSD up to 512GB
- Models with 45Wh battery: one drive, 1x M.2 SSD
  - M.2 2242 SSD up to 512GB

### Storage Slot

- Models with 38Wh battery: one 2.5" drive slot + one M.2 slot
  - One 2.5" SATA HDD slot
  - One M.2 2280 PCIe® 3.0 x4 slot
- Models with 45Wh battery: one M.2 slot
  - One M.2 2280 PCIe® 3.0 x4 slot

### Storage Type<sup>\*\*\*</sup>

Disk Type	Interface	RPM	Offering
2.5" SATA HDD	SATA 6Gb/s	5.4K	500GB / 1TB
M.2 2242 SSD	PCIe® NVMe®, PCIe® 3.0 x2	-	128GB
M.2 2242 SSD	PCIe® NVMe®, PCIe® x4	-	256GB / 512GB

## Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

## Removable Storage

### Optical

None

### Card Reader

No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

### Speakers

Stereo speakers, 1.5W x2, Dolby Audio™

### Microphone

Dual-microphone array

### Camera<sup>\*\*</sup>

- 0.3-megapixel, with privacy shutter, fixed focus
- HD 720p, with privacy shutter, fixed focus

## Battery

### Battery<sup>\*\*</sup>

- Integrated Li-Polymer 38Wh battery, supports Rapid Charge (charge up to 80% in 1hr)
- Integrated Li-Polymer 45Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

### Max Battery Life<sup>\*\*[1]</sup>

- MobileMark® 2018: 6 hr (38Wh)
- MobileMark® 2018: 8.5 hr (45Wh)

## Notes:

[1] All battery life claims are approximate maximum and based on results using the MobileMark® 2014, MobileMark® 2018,

MobileMark® 25, JEITA 2.0, JEITA 3.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

## Power Adapter

### Power Adapter\*\*<sup>[1]</sup>

- 65W round tip (2-pin, wall-mount) AC adapter, 100-240V, 50-60Hz
- 65W round tip (3-pin) AC adapter, 100-240V, 50-60Hz

Notes:

[1] AC adapter offerings depend on the country.

## DESIGN

### Display

#### Display\*\*

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)
14"	HD (1366x768)	None	TN	250nits	Anti-glare	16:9	500:1	45% NTSC	45° / 45° / - / -
14"	FHD (1920x1080)	None	TN	250nits	Anti-glare	16:9	500:1	45% NTSC	45° / 45° / - / -
14"	FHD (1920x1080)	None	IPS <sup>[1]</sup>	300nits	Anti-glare	16:9	800:1	45% NTSC	85° / 85° / - / -

#### Touchscreen

Non-touch

Notes:

[1] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

### Input Device

#### Keyboard

6-row, spill-resistant, multimedia Fn keys, SMB Service Hot key

#### Keyboard Backlight

Non-backlight

#### Touchpad

Buttonless Mylar® surface multi-touch touchpad, supports Precision TouchPad (PTP)

### Mechanical

#### Dimensions (WxDxH)<sup>[1]</sup>

324.2 x 215.2 x 19.9 mm (12.76 x 8.47 x 0.78 inches)

#### Weight<sup>[2]</sup>

Starting at 1.6 kg (3.53 lbs)

#### Case Color\*\*

- Black
- Iron grey

#### Surface Treatment\*\*

- IMR (in-mold decoration by roller)
- Texture

#### Case Material

PC-ABS (top), PC-ABS (bottom)

**Notes:**

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

### Network

**Ethernet**

Gigabit Ethernet, Realtek® RTL8111H-CG, 1x RJ-45, supports Wake-on-LAN

**WLAN + Bluetooth<sup>[1]</sup>**

Wi-Fi® 5, 802.11ac 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 Card

**Notes:**

[1] Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

### Ports<sup>[1]</sup>

**Standard Ports**

- 1x USB 2.0
- 1x USB 3.2 Gen 1
- 1x USB-C® 3.2 Gen 1 (support data transfer only)
- 1x HDMI® 1.4b
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)
- 1x Power connector

**Notes:**

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

### Docking

**Docking**

Various docking solutions supported via USB-C®.

For more compatible docking solutions, please visit [Docking for Lenovo® V14 G2 ITL](#)

## SECURITY & PRIVACY

### Security

**Security Chip**

Firmware TPM 2.0 integrated in SoC

**Physical Locks**

Kensington® Nano Security Slot™

**Fingerprint Reader**

No fingerprint reader

**BIOS Security**

- Supervisor password
- Power-on password
- Hard disk password

## Other Security

Camera privacy shutter

## SERVICE

### Warranty

#### Base Warranty\*\*

- 1-year courier or carry-in service
- 2-year (1-yr battery) courier or carry-in service
- No base warranty

## OPERATING REQUIREMENTS

### Operating Environment

#### Temperature<sup>[1][2]</sup>

- At altitudes up to 2438 m (8,000 ft)
  - Operating: 5°C to 35°C (41°F to 95°F)
  - Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)
  - Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

#### Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1], [2] When you charge the battery, its temperature must be no lower than 10°C (50°F).

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications<sup>[2]</sup>

- ErP Lot 3
- RoHS compliant

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ registration and ENERGY STAR® certification are optional and only available on the models with preloaded OS. Please visit [epeat.net](https://epeat.net) and [energystar.gov](https://energystar.gov) for more information.

### Other Certifications

#### Other Certifications

TÜV Rheinland® Low Blue Light

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. **LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to

you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel




intel



intel



intel

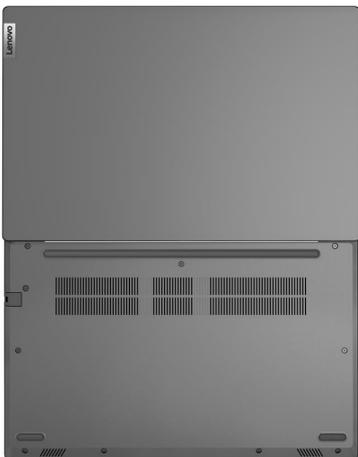

intel



intel