


## OVERVIEW

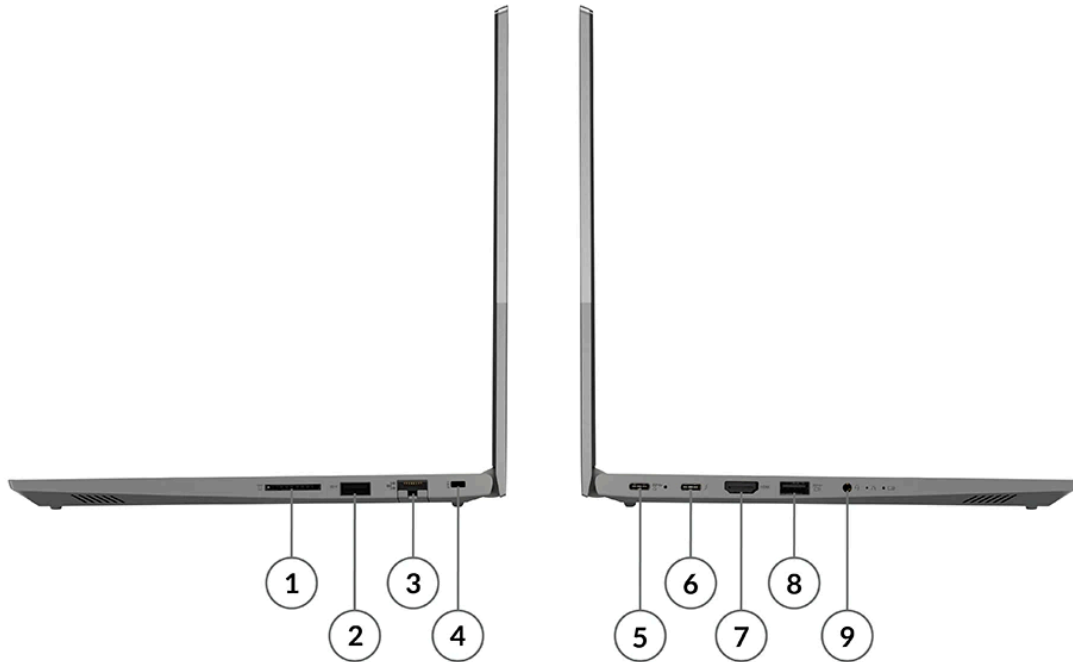

1. SD card reader	6. Thunderbolt 4
2. USB 3.2 Gen 1	7. HDMI
3. Ethernet (RJ-45)	8. USB 3.2 Gen 1 (Always On)
4. Kensington Nano Security Slot	9. Headphone / microphone combo jack (3.5mm)
5. USB-C 3.2 Gen 2	

## PERFORMANCE

### Processor

#### Processor Family

13th Generation Intel® U or P Series Core™ i3 / i5 / i7 Processor

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core™ i3-1315U	6 (2 P-core + 4 E-core)	8	P-core 1.2GHz / E-core 0.9GHz	P-core 4.5GHz / E-core 3.3GHz	10MB	Intel® UHD Graphics
Core™ i5-1335U	10 (2 P-core + 8 E-core)	12	P-core 1.3GHz / E-core 0.9GHz	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel® Iris® Xe Graphics <sup>[1]</sup>
Core™ i5-1340P	12 (4 P-core + 8 E-core)	16	P-core 1.9GHz / E-core 1.4GHz	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel® Iris® Xe Graphics <sup>[2]</sup>
Core™ i7-1355U	10 (2 P-core + 8 E-core)	12	P-core 1.7GHz / E-core 1.2GHz	P-core 5.0GHz / E-core 3.7GHz	12MB	Intel® Iris® Xe Graphics <sup>[3]</sup>
Core™ i7-1360P	12 (4 P-core + 8 E-core)	16	P-core 2.2GHz / E-core 1.6GHz	P-core 5.0GHz / E-core 3.7GHz	18MB	Intel® Iris® Xe Graphics <sup>[4]</sup>

Notes:

[1], [2], [3], [4] Intel® Iris® Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel® Iris® Xe Graphics will function as Intel® UHD Graphics.

### Operating System

#### Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- No preload operating system

### Graphics

#### Graphics\*\*

Graphics	Type	Memory	TGP	Key Features
Intel® UHD Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12.1
Intel® Iris® Xe Graphics <sup>[1]</sup>	Integrated	Shared	Share CPU TDP	DirectX® 12.1

Notes:

[1] Intel® Iris® Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel® Iris® Xe Graphics will function as Intel® UHD Graphics.

### Monitor Support

#### Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI®, USB-C® and Thunderbolt™)

- HDMI® supports up to 3840x2160@60Hz
- USB-C® supports up to 5120x3200@60Hz
- Thunderbolt™ supports up to 5120x3200@60Hz

### Chipset

#### Chipset

Intel® SoC (System on Chip) platform

### Memory

#### Max Memory<sup>[1]</sup>

Up to 16GB (8GB soldered + 8GB SO-DIMM) DDR4-3200 offering

### Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

### Memory Type

DDR4-3200

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

## Storage

### Storage Support<sup>[1][2]</sup>

Up to two drives, 2x M.2 SSD

- M.2 2242 SSD up to 1TB
- M.2 2280 SSD up to 1TB

### Storage Slot

Two M.2 2280 PCIe® 4.0 x4 slots

### Storage Type\*\*

Disk Type	Interface	Offering
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	512GB / 1TB
M.2 2242 SSD	PCIe® NVMe®, PCIe® 4.0 x4	256GB / 512GB / 1TB

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

[2] The system supports dual SSD via two M.2 slots, but Lenovo® only offers one SSD configuration, another SSD slot for user self-extension.

## Removable Storage

### Card Reader

SD card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

### Speakers

Stereo speakers, 2W x2, Dolby Audio™

### Microphone

Dual-microphone array with noise-cancelling

### Camera\*\*

- FHD 1080p, with privacy shutter, fixed focus
- HD 720p, with privacy shutter, fixed focus

## Battery

### Battery\*\*

- Integrated Li-Polymer 45Wh battery, supports Rapid Charge Pro (charge up to 50% in 30min)
- Integrated Li-Polymer 60Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

### Max Battery Life<sup>[1]</sup>

- MobileMark® 2018: 10.4 hr (60Wh)
- MobileMark® 2018: 8.0 hr (45Wh)

Notes:

[1] All battery life claims are approximate maximum and based on results using the MobileMark® 2014, MobileMark® 2018, MobileMark® 25, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness.

The maximum capacity of the battery will decrease with time and use.

## Power Adapter

### Power Adapter\*\*<sup>[1]</sup>

- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim (wall-mount) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

Notes:

<sup>[1]</sup> AC adapter offerings depend on the country.

## DESIGN

### Display

#### Display\*\*

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
14"	FHD (1920x1080)	None	TN	250nits	Anti-glare	16:9	500:1	45% NTSC	45°/45°/15°/35°	-
14"	FHD (1920x1080)	None	IPS <sup>[1]</sup>	300nits	Anti-glare	16:9	700:1	45% NTSC	85°/85°/85°/85°	TÜV Low Blue Light
14"	FHD (1920x1080)	Multi-touch	IPS <sup>[2]</sup>	300nits	Anti-glare	16:9	700:1	45% NTSC	85°/85°/85°/85°	TÜV Low Blue Light
14"	FHD (1920x1080)	None	IPS	300nits	Anti-glare	16:9	1200:1	100% sRGB	85°/85°/85°/85°	TÜV Low Blue Light

#### Touchscreen

- On-cell multi-touch, supports 10-point touch
- Non-touch

Notes:

<sup>[1]</sup>, <sup>[2]</sup> IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

### Input Device

#### Keyboard

6-row, spill-resistant, multimedia Fn keys, SMB Service Hot key

#### Keyboard Backlight

- LED backlight
- Non-backlight

#### Touchpad

Buttonless Mylar® surface multi-touch touchpad, supports Precision TouchPad (PTP), 70 x 105 mm (2.76 x 4.13 inches)

### Mechanical

#### Dimensions (WxDxH)<sup>[1]</sup>

323 x 218 x 17.9 mm (12.72 x 8.58 x 0.7 inches)

#### Weight<sup>[2]</sup>

Starting at 1.4 kg (3.09 lbs)

#### Case Color

Mineral grey, dual-tone design

#### Surface Treatment

Anodizing sandblasting

#### Case Material

Aluminium (top), aluminium (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

### Network

#### Ethernet\*\*[1]

- Gigabit Ethernet, Intel® Ethernet Connection I219-LM (vPro® models), 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Intel® Ethernet Connection I219-V (non-vPro® models), 1x RJ-45, supports Wake-on-LAN

#### WLAN + Bluetooth®\*\*[2]

- Wi-Fi® 6, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.2, M.2 card[3]
- Wi-Fi® 6E, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card[4]

Notes:

[1] Wake-on-LAN needs the power adapter plugged in.

[2] Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

[3] Wi-Fi® 6 full features might be limited by country-level restrictions.

[4] Wi-Fi® 6E full features might be limited by country-level restrictions.

6GHz Wi-Fi® 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi® 6E, and the regional regulatory certifications & spectrum allocation.

### Ports<sup>[1]</sup>

#### Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 1x USB-C® 3.2 Gen 2 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x Thunderbolt™ 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)
- 1x SD card reader

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

### Docking

#### Docking

Various docking solutions supported via Thunderbolt™ or USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkBook 14 G5 IRL](#)

## SECURITY & PRIVACY

### Security

#### Security Chip

Firmware TPM 2.0 integrated in SoC

#### Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

### Fingerprint Reader

Touch style fingerprint reader integrated in smart power button

### BIOS Security

- Administrator password
- Hard disk password
- Power-on password
- Self-healing BIOS

### Other Security

Camera privacy shutter

## MANAGEABILITY

### System Management

#### System Management

- Intel® vPro® Essentials<sup>[1]</sup>
- Non-vPro®

Notes:

[1] Intel® vPro® offers a superset of DASH's defined capabilities.

## SERVICE

### Warranty

#### Base Warranty\*\*

- 1-year courier or carry-in service
- 2-year (1-yr battery) courier or carry-in service

## ACCESSORIES

### Bundled Accessories

#### Bundled Accessories<sup>[1]</sup>

- Lenovo® 15.6" laptop casual toploader, polyester
- None

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for ThinkBook 14 G5 IRL](#)

## OPERATING REQUIREMENTS

### Operating Environment

#### Temperature<sup>[1]</sup>

- At altitudes up to 2438 m (8,000 ft)
  - Operating: 5°C to 35°C (41°F to 95°F)
  - Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)
  - Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

#### Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications<sup>[2]</sup>

- ENERGY STAR® 8.0
- EPEAT™ Gold Registered<sup>[3]</sup>
- ErP Lot 6
- ErP Lot 26
- RoHS compliant

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ registration and ENERGY STAR® certification are dependent on system OS. Please visit [epeat.net](http://epeat.net) and [energystar.gov](http://energystar.gov) for more information.

[3] EPEAT™ is registered where applicable, please visit [epeat.net](http://epeat.net) for registration status by country.

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed

#### Other Certifications<sup>[1]</sup>

(Optional) TÜV Rheinland® Low Blue Light (Software Solution)

Notes:

[1] TÜV Rheinland® Low Blue Light is Not applicable for TN display.


- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel

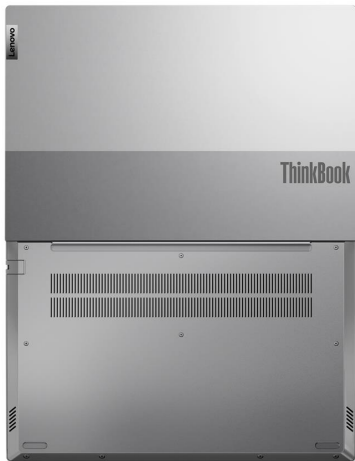

intel



intel



intel



intel