


OVERVIEW

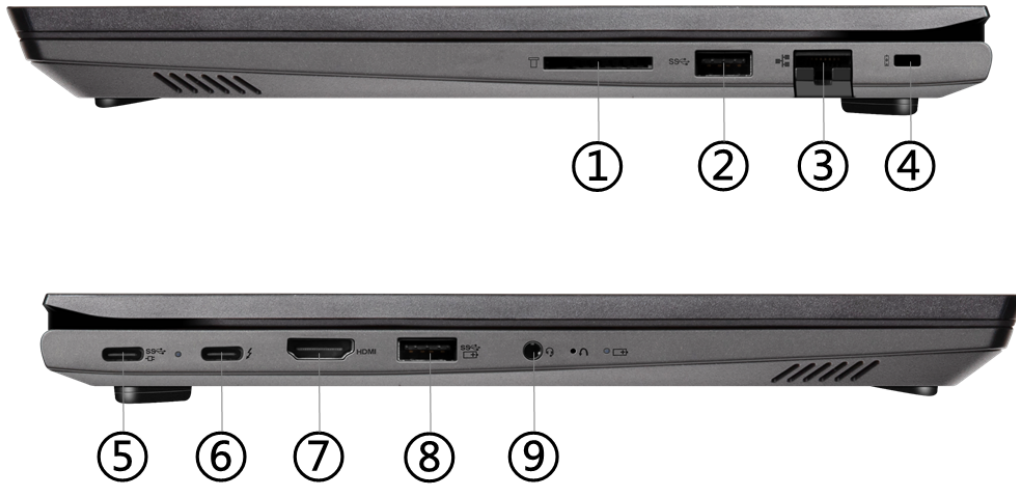

1. SD card reader	6. Thunderbolt 4
2. USB 3.2 Gen 1	7. HDMI
3. Ethernet (RJ-45)	8. USB 3.2 Gen 1 (Always On)
4. Kensington Nano Security Slot	9. Headphone / microphone combo jack (3.5mm)
5. USB-C 3.2 Gen 2	

PERFORMANCE

Processor

Processor Family

12th Generation Intel® Core™ i3 / i5 / i7 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core™ i3-1215U	6 (2 P-core + 4 E-core)	8	P-core 1.2GHz / E-core 0.9GHz	P-core 4.4GHz / E-core 3.3GHz	10MB	Intel® UHD Graphics
Core™ i5-1235U	10 (2 P-core + 8 E-core)	12	P-core 1.3GHz / E-core 0.9GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	Intel® Iris® Xe Graphics ^[1]
Core™ i5-1240P	12 (4 P-core + 8 E-core)	16	P-core 1.7GHz / E-core 1.2GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	Intel® Iris® Xe Graphics ^[2]
Core™ i7-1255U	10 (2 P-core + 8 E-core)	12	P-core 1.7GHz / E-core 1.2GHz	P-core 4.7GHz / E-core 3.5GHz	12MB	Intel® Iris® Xe Graphics ^[3]
Core™ i7-1260P	12 (4 P-core + 8 E-core)	16	P-core 2.1GHz / E-core 1.5GHz	P-core 4.7GHz / E-core 3.4GHz	18MB	Intel® Iris® Xe Graphics ^[4]

Notes:

[1], [2], [3], [4] Intel® Iris® Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel® Iris® Xe Graphics will function as Intel® UHD Graphics.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home Single Language
- VM DOS

Graphics

Graphics**

Graphics	Type	Memory	TGP	Key Features
Intel® UHD Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12.1
Intel® Iris® Xe Graphics ^[1]	Integrated	Shared	Share CPU TDP	DirectX® 12.1
NVIDIA® GeForce MX550	Discrete	2GB GDDR6	-	DirectX® 12

Notes:

[1] Intel® Iris® Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel® Iris® Xe Graphics will function as Intel® UHD Graphics.

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI®, USB-C® and Thunderbolt™)

- HDMI® supports up to 3840x2160@60Hz
- USB-C® supports up to 5120x3200@60Hz
- Thunderbolt™ supports up to 5120x3200@60Hz

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory^[1]

Up to 16GB (8GB soldered + 8GB SO-DIMM) DDR4-3200 offering

Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

Memory Type

DDR4-3200

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

Storage

Storage Support^[1]

Up to two drives, 2x M.2 SSD

- M.2 2242 SSD up to 512GB
- M.2 2280 SSD up to 1TB

Storage Slot

Two M.2 2280 PCIe® 4.0 x4 slots

Storage Type**

Disk Type	Interface	Offering
M.2 2242 SSD	PCIe® NVMe®, PCIe® 3.0 x4	512GB
M.2 2242 SSD	PCIe® NVMe®, PCIe® 4.0 x4	256GB / 512GB
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	1TB

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

Removable Storage

Card Reader

SD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™

Microphone

Dual-microphone array

Camera

HD 720p, with privacy shutter, fixed focus

Battery

Battery**

- Integrated Li-Polymer 45Wh battery, supports Rapid Charge Pro (charge up to 50% in 30min)
- Integrated Li-Polymer 60Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

Max Battery Life^[1]

- MobileMark® 2018: 6 hr (45Wh)
- MobileMark® 2018: 8 hr (60Wh)

Notes:

[1] All battery life claims are approximate maximum and based on results using the MobileMark® 2014, MobileMark® 2018, MobileMark® 25, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter

65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

DESIGN

Display

Display**

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)
14"	FHD (1920x1080)	None	TN	250nits	Anti-glare	16:9	500:1	45% NTSC	45°/45°/15°/35°
14"	FHD (1920x1080)	None	IPS ^[1]	300nits	Anti-glare	16:9	700:1	45% NTSC	85°/85°/85°/85°

Touchscreen

Non-touch

Notes:

[1] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys, SMB Service Hot key

Keyboard Backlight

- LED backlight
- Non-backlight

Touchpad

Buttonless Mylar® surface multi-touch touchpad, supports Precision TouchPad (PTP), 70 x 105 mm (2.76 x 4.13 inches)

Mechanical

Dimensions (WxDxH)^[1]

324 x 218 x 17.9 mm (12.76 x 8.58 x 0.7 inches)

Weight^[2]

Starting at 1.4 kg (3.09 lbs)

Case Color**

- Mineral grey
- Onyx black

Surface Treatment

Anodizing sandblasting

Case Material

Aluminium (top), aluminium (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Ethernet

Gigabit Ethernet, 1x RJ-45, supports Wake-on-LAN

WLAN + Bluetooth®^[1]**

- 802.11ac 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card
- Wi-Fi® 6, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card
- Wi-Fi® 6E, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card

Notes:

^[1] Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

Ports^[1]**Standard Ports**

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 1x USB-C® 3.2 Gen 2 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x Thunderbolt™ 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)
- 1x SD card reader

Notes:

^[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

SECURITY & PRIVACY

Security

Security Chip

No security chip

Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

Fingerprint Reader

- Touch style fingerprint reader integrated in power button
- No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- Hard disk password
- Self-healing BIOS

Other Security

Camera privacy shutter

SERVICE

Warranty

Base Warranty^[1]

1-year carry-in service

Notes:

[1] More information of warranty policy, please access <https://newsupport.lenovo.com.cn>.

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- At altitudes up to 2438 m (8,000 ft)
 - Operating: 5°C to 35°C (41°F to 95°F)
 - Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)
 - Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^[2]

- (Optional) CECP
- CCC
- CEL
- EMC Class-B
- ENERGY STAR® 8.0
- RoHS compliant

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

[2] EPEAT™ registration and ENERGY STAR® certification are dependent on system OS. Please visit epeat.net and energystar.gov for more information.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

Other Certifications^[1]

(Optional) TÜV Rheinland® Low Blue Light (Software Solution)

Notes:

[1] TÜV Rheinland® Low Blue Light is Not applicable for TN display.

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to

you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

